




92X92X15 mm 36.25~55.76 CFM



■ P-Q Curve (At Rated Voltage)

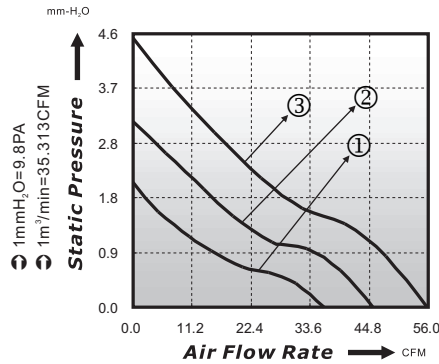


■ Dimensions Drawing

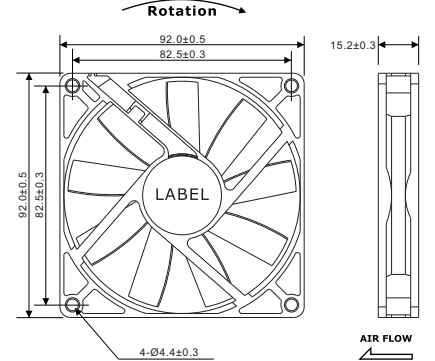

Model NO.	Bearing(*) ○ ▲ ● ⊖	Rated Voltage (VDC)	Rated Current (A)	Power Consumption (Watts)	Speed (rpm)	Air Flow (CFM)	Static Pressure (mm-H ₂ O)	Noise (dBA)	Curve
PLA09215B05L	✓ ✓ ✓ ✓	5	0.35	1.75	2000	36.25	2.10	29.9	1
PLA09215B05M	✓ ✓ ✓ ✓	5	0.50	2.50	2500	45.54	3.12	36.0	2
PLA09215B12L	✓ ✓ ✓ ✓	12	0.20	2.40	2000	36.25	2.10	29.9	1
PLA09215B12M	✓ ✓ ✓ ✓	12	0.35	4.20	2500	45.54	3.12	36.0	2
PLA09215B12H	✓ ✓ ✓ ✓	12	0.55	6.60	3000	55.76	4.53	40.3	3
PLA09215B24L	✓ ✓ ✓ ✓	24	0.20	4.80	2000	36.25	2.10	29.9	1
PLA09215B24M	✓ ✓ ✓ ✓	24	0.30	7.20	2500	45.54	3.12	36.0	2
PLA09215B24H	✓ ✓ ✓ ✓	24	0.40	9.60	3000	55.76	4.53	40.3	3


* Bearing Type: ○ Sleeve ▲ One Ball and One Sleeve ● Two Ball ⊖ Hydro-Dynamic

92X92X25 mm 38.23~81.98 CFM




Type A

■ P-Q Curve (At Rated Voltage)

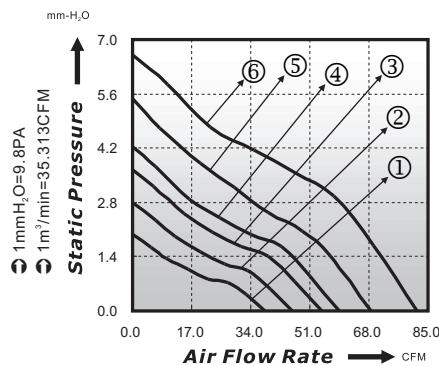

■ Dimensions Drawing

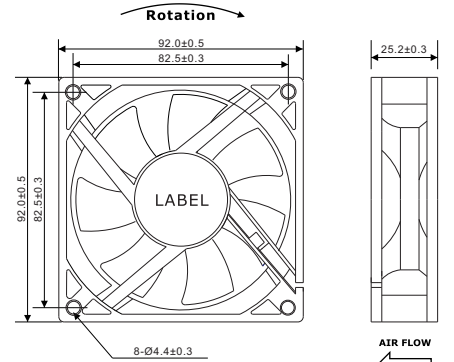

Model NO.	Bearing(*) ○ ▲ ● ⊖	Rated Voltage (VDC)	Rated Current (A)	Power Consumption (Watts)	Speed (rpm)	Air Flow (CFM)	Static Pressure (mm-H ₂ O)	Noise (dBA)	Curve
PLA09225B12L	✓ ✓ ✓ ✓	12	0.13	1.56	1900	38.23	1.98	26.8	1
PLA09225B12M	✓ ✓ ✓ ✓	12	0.20	2.40	2400	46.00	2.78	32.6	2
PLA09225B12H	✓ ✓ ✓ ✓	12	0.28	3.36	2800	54.46	3.65	35.8	3
PLA09225B24L	✓ ✓ ✓ ✓	24	0.09	2.16	1900	38.23	1.98	26.8	1
PLA09225B24M	✓ ✓ ✓ ✓	24	0.14	3.36	2400	46.00	2.78	32.6	2
PLA09225B24H	✓ ✓ ✓ ✓	24	0.19	4.56	2800	54.46	3.65	35.8	3
PLA09225B48L	✓ ✓ ✓ ✓	48	0.15	7.20	2400	46.00	2.78	32.6	2
PLA09225B48M	✓ ✓ ✓ ✓	48	0.20	9.60	3000	59.52	4.23	38.1	4
PLA09225B48H	✓ ✓ ✓ ✓	48	0.25	12.00	3600	68.48	5.48	43.2	5
PLA09225B48HH	✓ ✓ ✓ ✓	48	0.30	14.40	4200	81.98	6.60	47.4	6

* Bearing Type: ○ Sleeve ▲ One Ball and One Sleeve ● Two Ball ⊖ Hydro-Dynamic